



Technical Specifications VSP SS 07075 Range




- Diffuser** : Stainless steel (AISI 304L) **Max. sand content** : 50 gr / m³
- Impeller** : Stainless steel (AISI 304L) **Valve cap** : Stainless steel
- Pump shaft** : Stainless steel (AISI 420) **Voltage** : 380-415 V (+%6 / -%10)
- Coupling** : Stainless steel (AISI 420) **Frequency** : 50 Hz.
- Strainer** : Stainless steel (AISI 304) **Max. water temperature** : 60°C (80°C optional)
- Outlet connection diameter** : 5" (inside threaded) **Degree of protection** : IP 68

Pump type	Stages	Motor		Dimensions (mm)					Weight (kg)		
		KW	HP	L	LM	LP	ΦM	ΦP	Motor	Pump	Total
VSP SS 07075/01	1	4,0	5,5	1.128	649	479	142	172	40	24	64
VSP SS 07075/02	2	7,5	10,0	1.365	758	607	142	172	50	29	79
VSP SS 07075/03	3	11,0	15,0	1.586	851	735	142	172	60	33	93
VSP SS 07075/04	4	15,0	20,0	1.836	973	863	142	172	72	36	108
VSP SS 07075/05	5	18,5	25,0	1.997	1.006	991	142	172	76	39	115
VSP SS 07075/06	6	22,0	30,0	2.225/2.009	1.106/890	1.119	142/172	172	87/86	43	130/129
VSP SS 07075/07	7	26,0	35,0	2.353/2.137	1.106/890	1.247	142/172	172	87/86	47	134/133
VSP SS 07075/08	8	30,0	40,0	2.622/2.355/2.431	1.247/980/1.056	1.375	142/172/192	172	103/103/129	53	156/156/182
VSP SS 07075/09	9	37,0	50,0	2.850/2.563/2.619	1.347/1.060/1.116	1.503	142/172/192	172	110/113/138	57	167/170/195
VSP SS 07075/10	10	37,0	50,0	2.978/2.691/2.747	1.347/1.060/1.116	1.631	142/172/192	172	110/113/138	61	171/174/199
VSP SS 07075/11	11	37,0	50,0	1.759/2.819/2.875	1.060/1.116	1.759	172/192	172	113/138	65	178/203
VSP SS 07075/12	12	45,0	60,0	3.042/3.104	1.139/1.201	1.903	172/192	172	127/152	67	194/219
VSP SS 07075/14	14	52,0	70,0	3.377/3.445	1.218/1.286	2.159	172/192	172	138/170	74	212/244
VSP SS 07075/15	15	52,0	70,0	3.573	1.286	2.287	192	172	170	78	248
VSP SS 07075/16	16	60,0	80,0	3.756	1.341	2.415	192	172	185	83	268
VSP SS 07075/17	17	60,0	80,0	3.884	1.341	2.543	192	172	185	87	272
VSP SS 07075/18	18	66,0	90,0	4.037	1.366	2.671	192	172	186	91	277

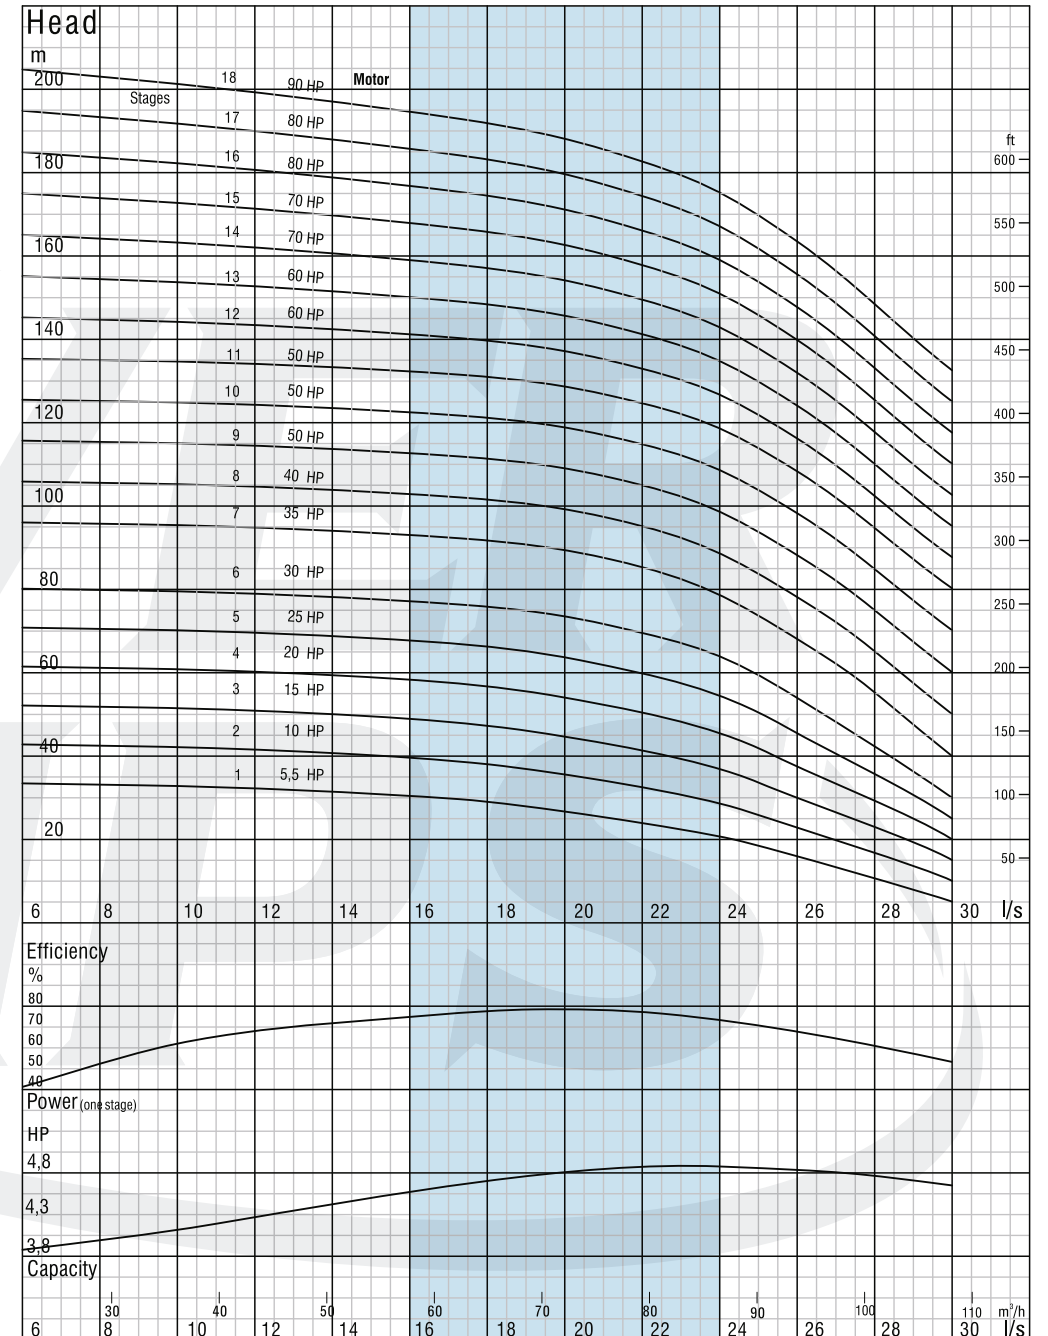

Technical Specifications VSP SS 07095 Range



- Diffuser** : Stainless steel (AISI 304L) **Max. sand content** : 50 gr / m³
- Impeller** : Stainless steel (AISI 304L) **Valve cap** : Stainless steel
- Pump shaft** : Stainless steel (AISI 420) **Voltage** : 380-415 V (+%6 / -%10)
- Coupling** : Stainless steel (AISI 420) **Frequency** : 50 Hz.
- Strainer** : Stainless steel (AISI 304) **Max. water temperature** : 60°C (80°C optional)
- Outlet connection diameter** : 5" (inside threaded) **Degree of protection** : IP 68

Pump type	Stages	Motor		Dimensions (mm)					Weight (kg)		
		kW	HP	L	LM	LP	ΦM	ΦP	Motor	Pump	Total
VSP SS 07095/01	1	5,5	7,5	1.147	668	479	142	172	47	25	72
VSP SS 07095/02	2	9,3	12,5	1.395	788	607	142	172	57	29	86
VSP SS 07095/03	3	15,0	20,0	1.698	963	735	142	172	72	33	105
VSP SS 07095/04	4	18,5	25,0	1.859	996	863	142	172	80	37	117
VSP SS 07095/05	5	22,0	30,0	2.087/1.881	1.096/890	991	142/172	172	86/105	40	126/145
VSP SS 07095/06	6	30,0	40,0	2.356/2.721	1.237/980/1.039	1.119	142/172/192	172	104/117/127	43	147/160/170
VSP SS 07095/07	7	37,0	50,0	2.584/2.307/2.346	1.337/1.060/1.099	1.247	142/172/192	172	111/127/133	47	158/174/180
VSP SS 07095/08	8	37,0	50,0	2.712/2.435/2.474	1.337/1.060/1.099	1.375	142/172/192	172	111/127/133	51	162/178/184
VSP SS 07095/09	9	45,0	60,0	2.658/2.703	1.139/1.184	1.519	172/192	172	142/140	54	196/194
VSP SS 07095/10	10	45,0	60,0	2.786/2.831	1.139/1.184	1.647	172/192	172	142/140	59	201/199
VSP SS 07095/11	11	52,0	70,0	2.993/3.044	1.218/1.269	1.775	172/192	172	153/146	63	216/209
VSP SS 07095/12	12	55,0	75,0	3.209/3.172	1.306/1.269	1.903	172/192	172	164/152	66	130/218
VSP SS 07095/13	13	60,0	80,0	3.355	1.324	2.031	192	172	160	70	230
VSP SS 07095/14	14	66,0	90,0	3.508	1.349	2.159	192	172	169	74	243
VSP SS 07095/15	15	75,0	100	3.661	1.374	2.287	192	172	190	78	268
VSP SS 07095/16	16	75,0	100	3.789	1.374	2.415	192	172	190	81	271
VSP SS 07095/17	17	81,0	110	4.097/3.997	1.454/1.354	2.543	192/231	172	197/255	84	281/329
VSP SS 07095/18	18	81,0	110	4.225/4.125	1.454/1.354	2.671	192/231	172	197/255	88	285/366
VSP SS 07095/19	19	92,0	125	4.423/4.318	1.519/1.414	2.799	192/231	172	208/274	92	300/368
VSP SS 07095/20	20	92,0	125	4.551/4.446	1.519/1.414	2.927	192/231	172	208/274	95	303/371
VSP SS 07095/21	21	110	150	4.549	1.494	3.055	231	172	299	98	397
VSP SS 07095/22	22	110	150	4.677	1.494	3.183	231	172	299	102	401

